



ATS-TSS 2020 and Newer Can-Am Instrument Cluster Turn Indicator Interface

Thank you for purchasing XTC Power Products TSS-CAN-INS. This item is from our Plug & Play™ product line, no wires to cut, no crimping, just plug it in! Once installed the OEM Turn LED's will Flash when the Turn System is Activated.

Please read the instructions fully and familiarize yourself with the components before starting the install.

Note: This only works on 2020 and newer model years.

The connector has power in it, disconnect the battery during installation.

1. **Disconnect Battery** – Remove the ground cable from the battery to reduce the chances of blowing a fuse.
2. **Unplug Connector** – From the rear of the Instrument Cluster.





3. **Remove Connector Lock** – Using a small screwdriver or pick, remove the white terminal lock from the connector as shown, exposing the terminals and plugs.



4. **Remove Plugs** – Using a pair of needle nose pliers or pick, remove the plugs from wire ports 7 and 17.




5. **Insert Wires** – Insert the green connector wire into port 7, insert the yellow connector wire into port 17.

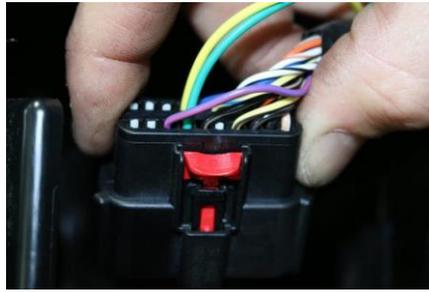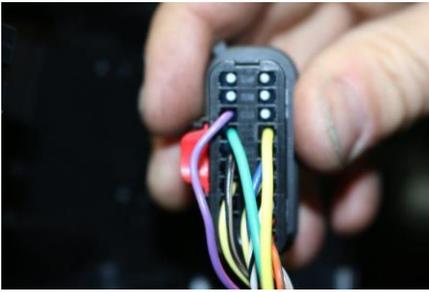

6. **Re-install Lock** – Re-install plastic locking cover, plug connector back into the display and run the adapter wire to the TSS or ATS front plugs.



7. **Unplug** – the front harness from the TSS and insert the adapter in between the two connectors.

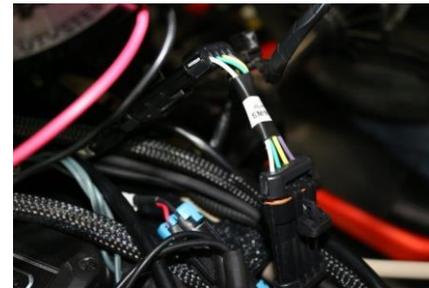

8. Hook the **battery ground cable** back up to the battery and test the operation of the Turn System.

XTC Power Products LLC
A Division of XTC Motorsports LLC
380 E. Comstock Dr.
Chandler, AZ 85225
480-558-8588
www.xtcpowerproducts.com